


A-LAS Series

▶ A-LAS-F24-...

- Analog signal (0...+10V) in connection with an electronic control unit type AGL3, AGL4, AGL4-HS, AGL-DIF, SI-CON11 (without PC connection) or SI-CON4, SI-CON8, SI-CON34, A-LAS-CON1 (with PC connection and software)
(stand-alone operation of the light barrier is not possible)
- Parallel aligned, visible red laser beam (<0.39 mW, 670 nm), **laser class 1**
- Various apertures and fork sizes available
- Measuring range up to 16 mm (depends on aperture)
- Working range = fork width
- Insensitive to outside light due to interference filter
- Compact design, sturdy metal housing, IP67

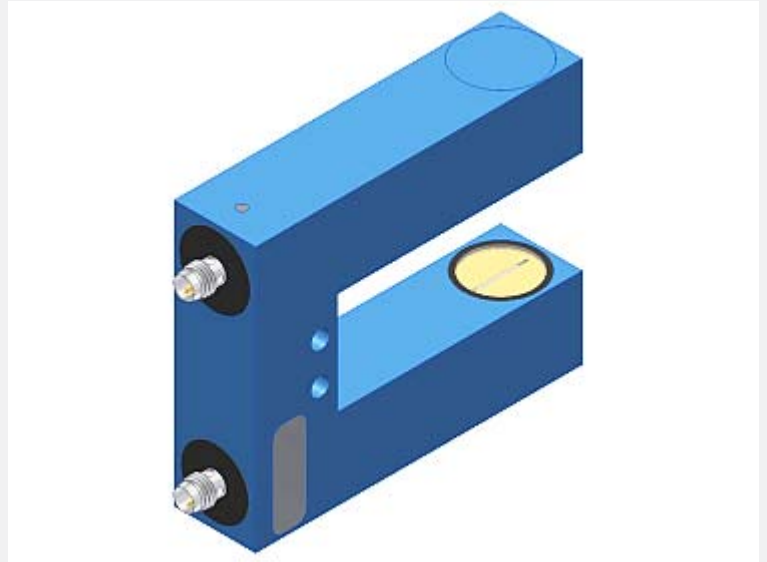

Design

Product name:


A-LAS-F24-(aperture)*-(fork size)**

*Available apertures:


Same aperture for transmitter and for receiver:

AxB (mm):

5x0.3
9.5x0.2
9.5x1.5
10x0.3
16x0.5
16x1
16x2




0.2x9.5
0.3x5
0.3x10
0.5x16
1x16
1.5x9.5
2x16



**Available fork sizes:


Fork size	Fork width (mm)	Fork depth (mm)
20/60	20	60
30/60	30	60
40/60	40	60
50/60	50	60
100/60	100	60
100/80	100	80
100/100	100	100

Fork width = distance transmitter to receiver optics
Fork depth = inner length to center of aperture

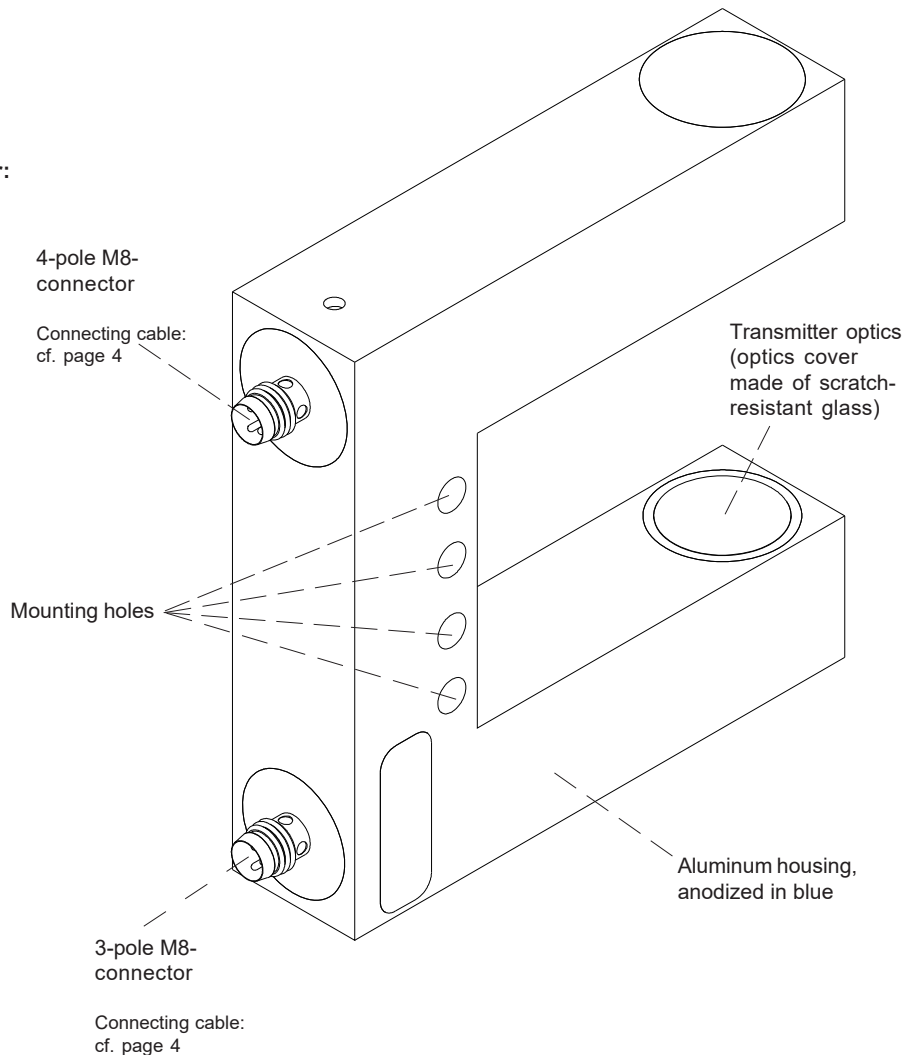



Technical Data


Type	A-LAS-F24
Shape	Laser light barrier in fork shape with 24 mm thick housing. Various rectangular apertures are available.
Laser	Solid-state laser, 670 nm, DC-operation, 0.39 mW max. opt. power, laser class 1 acc. to DIN EN 60825-1. The use of these laser transmitter therefore requires no additional protective measures.
Available aperture sizes	Standard apertures (mm) for transmitter: 16x2, 16x1, 16x0.5, 10x0.3, 9.5x1.5, 9.5x0.2, 5x0.3 (recommended aperture combinations for transmitter and receiver: cf. page 1)
Measuring range	Up to 16 mm (depends on the aperture used)
Working range	Max. 5 m (depends on the aperture used)
Min. detectable object	Typ. 0.5% of aperture size
Reproducibility	Typ. 0.5% of aperture size, with threshold correction (via electronic control unit): typ. 0.1% of aperture size
Threshold correction	Can be activated via a software-controlled electronics of type A-LAS-CON1, SI-CON4, SI-CON8, or SI-CON34
Optical filters	Red light filter RG 630 and interference filter
Voltage supply	Transmitter: +5VDC, receiver: +5VDC
Ambient light (outside light)	With 5000 Lux ambient light around optical receiver unit typ. < 300mV influence on analog signal (0...+10V) (depends on the aperture used)
Analog output	0 ... +10V (in connection with any electronic control unit of A-LAS Series)
Band width analog signal	100 kHz (-3 dB)
Current control input (I-CONTROL)	0V ... 5V, laser power decreases linear to increase of voltage: 0V: full power, 5V: laser off
Sensitivity setting (switching threshold)	Via software (with control electronics A-LAS-CON1, SI-CON4, SI-CON34, or SI-CON8) or via potentiometer (with control electronics AGL4 or AGL4-HS)
Gain (analog signal)	Via software (with control electronics A-LAS-CON1, SI-CON4, SI-CON34, or SI-CON8) or via potentiometer (with control electronics AGL4, AGL4-HS, AGL-DIF, or SI-CON11)
Current consumption	Transmitter: typ. 50 mA, receiver typ. 20 mA
Operating temperature range	0°C ... +50°C
Storage temperature range	-20°C ... +85°C
Type of connector	Transmitter: 3-pole M8-connector, receiver: 4-pole M8-connector
Housing material	Aluminum, anodized in blue
Housing dimensions	Cf. page 3
Enclosure rating	IP67
EMC test acc. to	DIN EN 60947-5-2 



Laser Information

The laser transmitters of A-LAS series comply with laser class 1 according to EN 60825-1. Under reasonably foreseeable conditions a class 1 laser is safe. The reasonably foreseeable conditions are kept during specified normal operation. The use of these laser transmitters therefore requires no additional protective measures.

The laser transmitters of A-LAS series series are supplied with an information label „CLASS 1 Laser Product“.

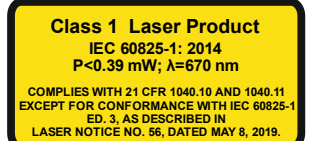





Dimensions

A-LAS-F24-....(fork size):

Fork size	Fork width A	Fork depth B
20/60	20 mm	60 mm
30/60	30 mm	60 mm
40/60	40 mm	60 mm
50/60	50 mm	60 mm
100/60	100 mm	60 mm
100/80	100 mm	80 mm
100/100	100 mm	100 mm

A= Fork width (distance transmitter to receiver optics)
 B= Fork depth (inner length to center of aperture)

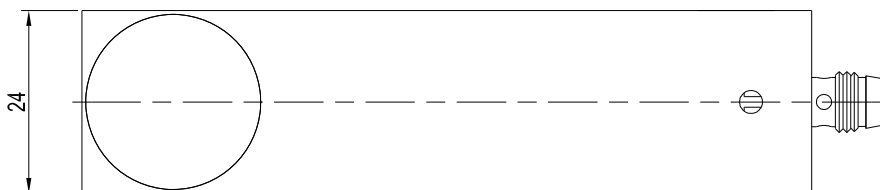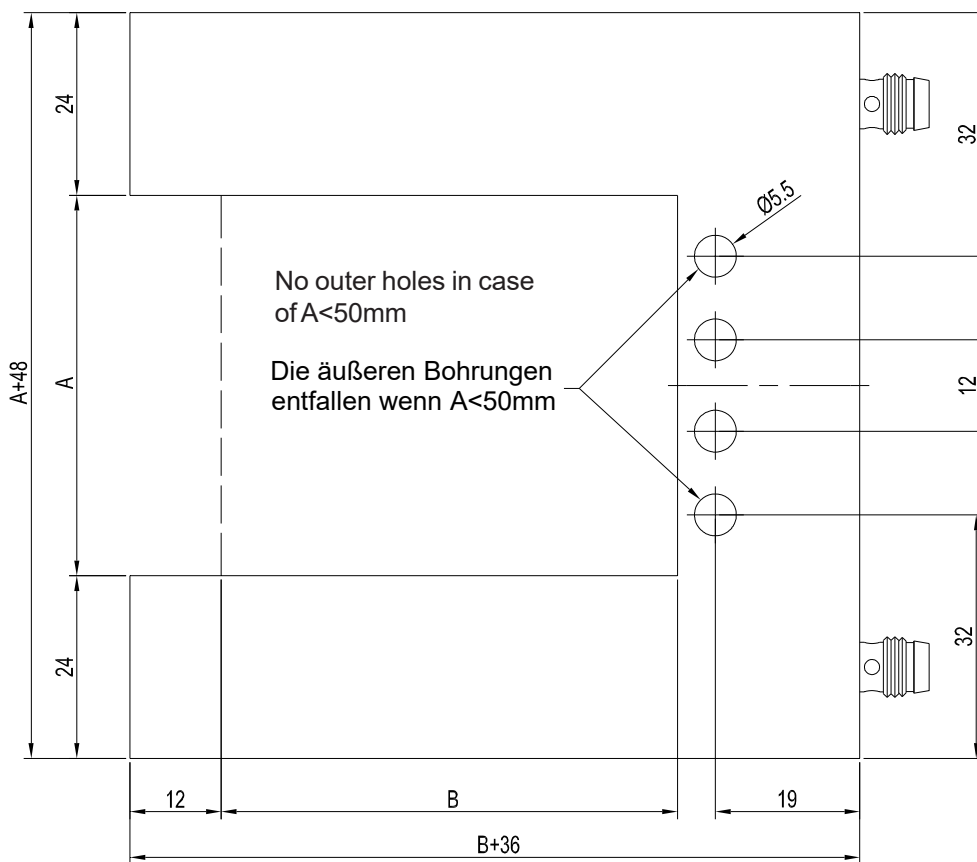


All dimensions in mm

Connector Assignment


Receiver: 4-pole M8-connector

Pin No.:	Assignment:
1	+5 VDC
2	GND (0V)
3	SHIELD
4	ANALOG



Transmitter: 3-pole M8-connector

Pin No.:	Assignment:
1	+5 VDC
3	GND (0V)
4	I-CONTROL (0V...+5V)



Connecting cables:

For use with SI-CON4:


cab-las3-(length) or cab-las3-w-(length) für transmitter
 cab-las4-(length) or cab-las4-w-(length) für receiver
 (standard length each 1m, also available lengths: 2m, 3m, or 5m)

For use with AGL4, AGL4-HS, AGL-DIF, SI-CON11, SI-CON8, SI-CON34, A-LAS-CON1:

cab-las-y-(length) or
 cab-las-y-w-(length)
 (standard length each 1m, also available lengths: 2m, 3m, or 5m)


For use with AGL3:

no connecting cable is necessary

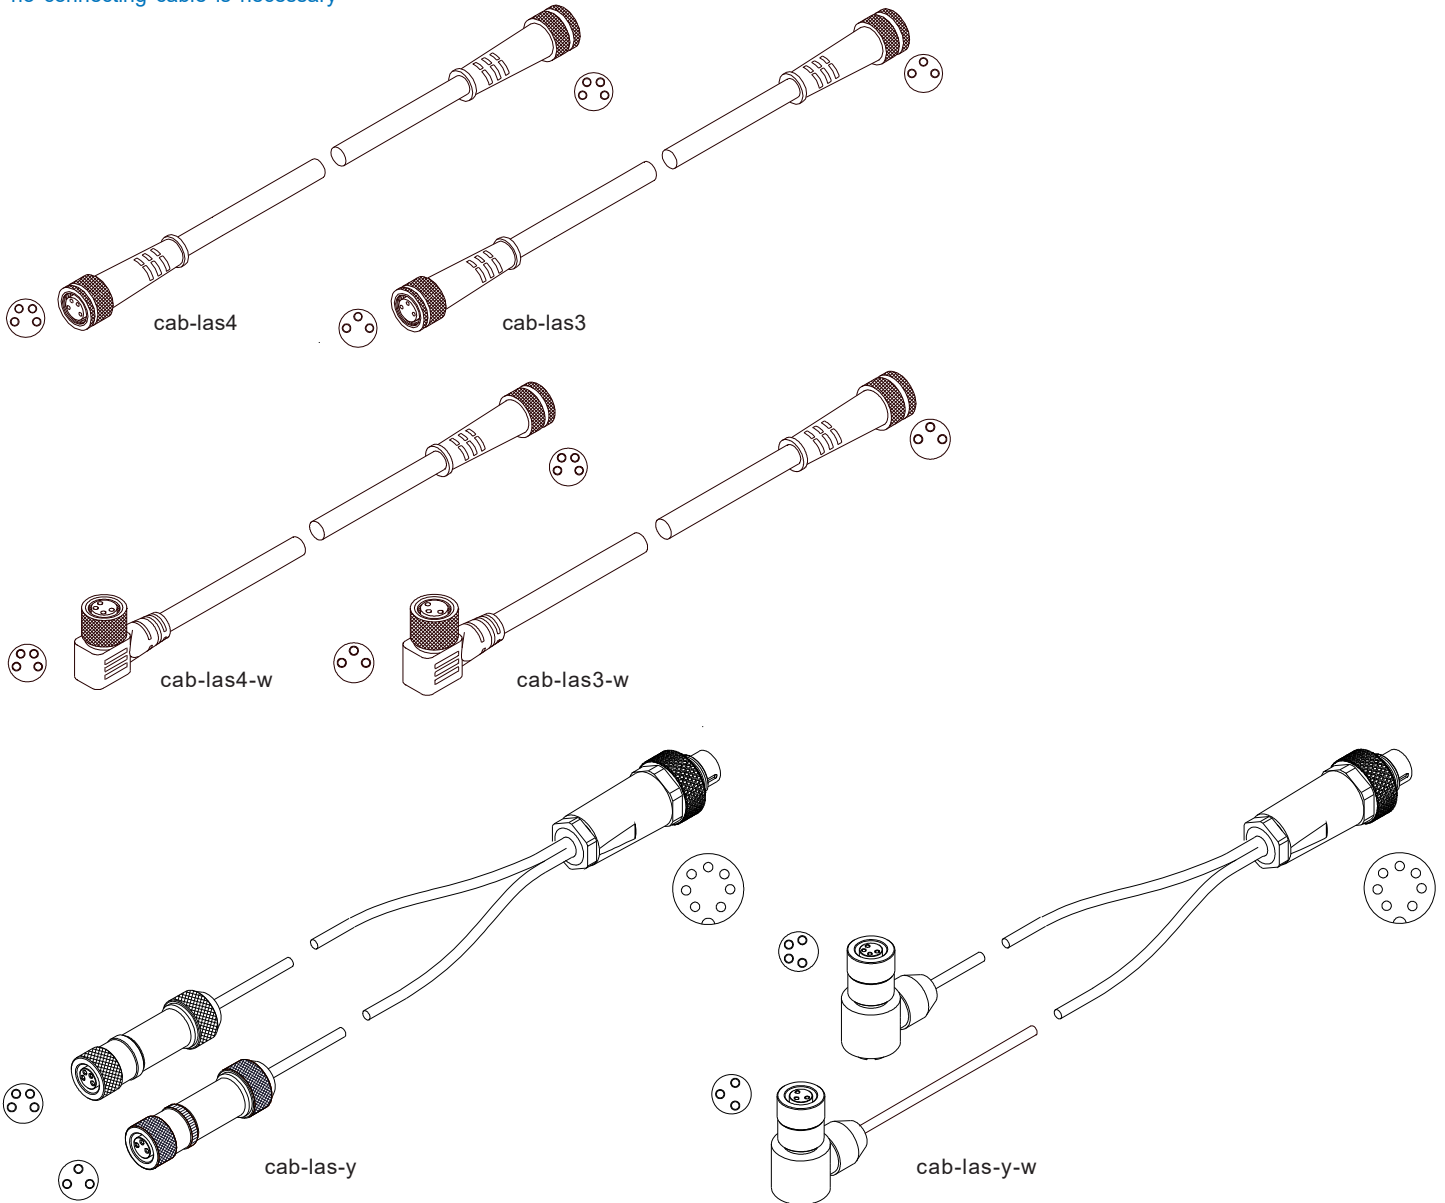


Electronic Control Units


Suitable electronic control units:

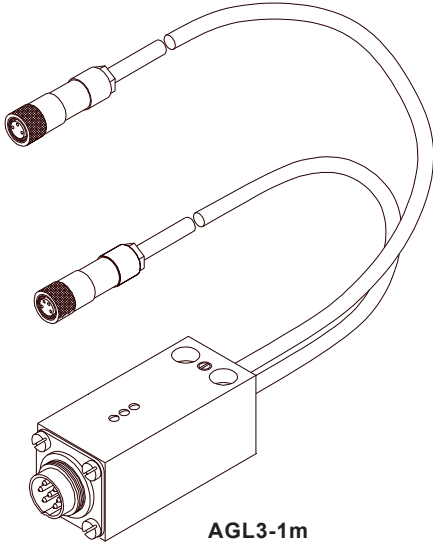


AGL3-1m
AGL3-2m
AGL3-3m
AGL3-4m
AGL3-5m

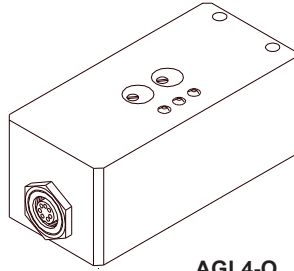


AGL4-Q
AGL4-Qinv
AGL4-Qinv-200ms

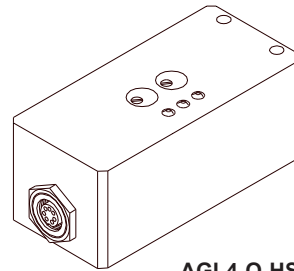


AGL4-Q-HS-500kHz-24V_LED
AGL4-Qinv-HS-500kHz-24V_LED

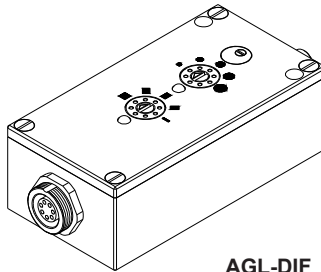


AGL-DIF

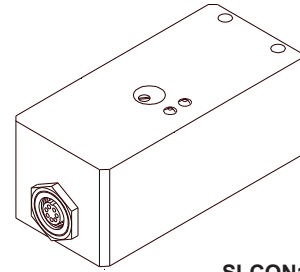


SI-CON11-0/20
SI-CON11-0/20-5V
SI-CON11-0/20-IC
SI-CON11-4/20
SI-CON11-4/20-IC
SI-CON11-5/25
SI-CON11-5/25-IC

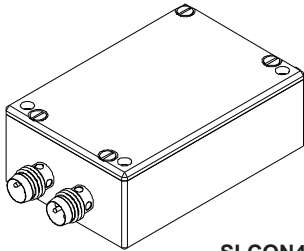


SI-CON4
(incl. Windows® PC software
A-LAS-Scope)

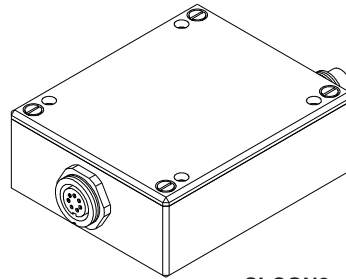

SI-CON8
(incl. Windows® PC software
SI-CON8-Scope)

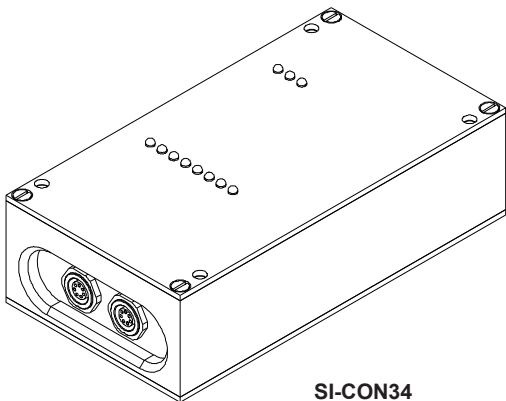

SI-CON34
(incl. Windows® PC software
SCOPE34)

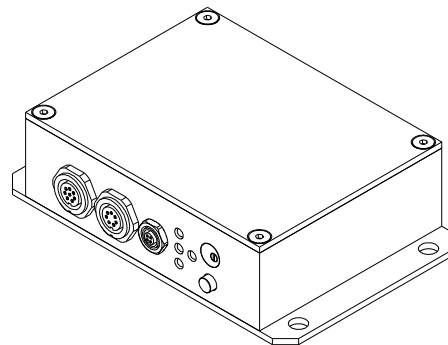

A-LAS-CON1
(incl. Windows® PC software
A-LAS-CON1-Scope)