
A-LAS Series

A-LAS-12/90-...-C


- Analog signal (0...+10V) in connection with an electronic control unit type AGL4, AGL4-HS, AGL-DIF, SI-CON11 (without PC connection) or SI-CON8, SI-CON34, A-LAS-CON1 (with PC connection and software) (stand-alone operation of the light barrier is not possible)
- Parallel aligned, visible red laser beam (<0.39 mW, 670 nm), laser class 1
- Various apertures available
- Measuring range up to 6.5 mm (depends on aperture)
- Working range max. 10 m (depends on aperture)
- Insensitive to outside light due to interference filter
- Compact design, sturdy metal housing, IP67



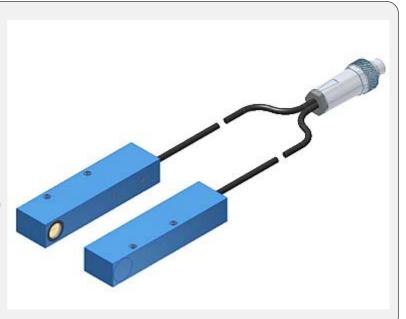

Design

Product name:

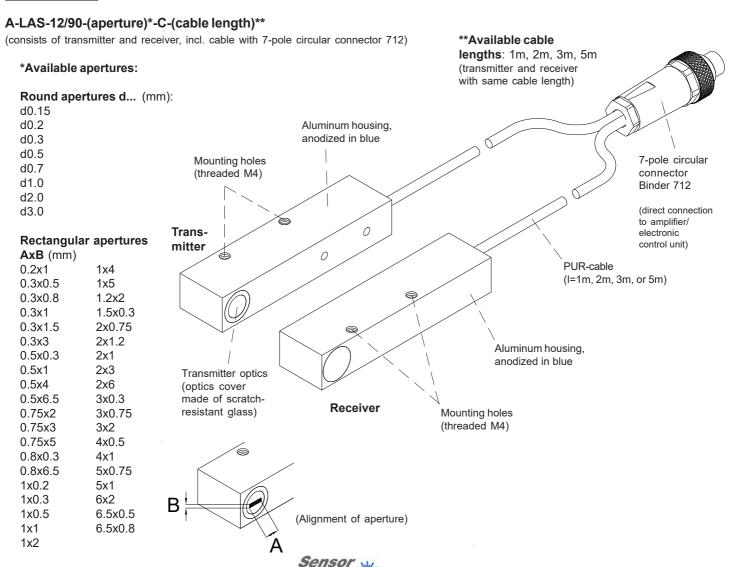

Instruments





Technical Data

Туре	A-LAS-12/90-C
Shape	Split laser light barrier in rectangular housing. Various round and rectangular apertures are available.
Laser	Solid-state laser, 670 nm, DC-operation, 0.39 mW max. opt. power, laser class 1 acc. to DIN EN 60825-1. The use of these laser transmitter therefore requires no additional protective measures.
Available aperture sizes	Cf. page 1
Measuring range	Up to 6.5 mm (depends on the aperture used)
Working range	Max. 10 m (depends on the aperture used and on cable length)
Min. detectable object	Typ. 0.8% of aperture size
Reproducibility	Typ. 0.8% of aperture size, with threshold correction (via electronic control unit): typ. 0.1% of aperture size
Threshold correction	Can be activated via a software-controlled electronics of type A-LAS-CON1, SI-CON8, or SI-CON34
Optical filters	Red light filter RG 630 and interference filter
Voltage supply	Transmitter: +5VDC, receiver: +5VDC
Ambient light (outside light)	With 5000 Lux ambient light around optical receiver unit typ. < 300mV influence on analog signal (0+10V)
Analog output	0 +10V (in connection with any electronic control unit of A-LAS Series)
Band width analog signal	100 kHz (-3 dB)
Current control input (I-CONTROL)	0V 5V, laser power decreases linear to increase of voltage: 0V: full power, 5V: laser off
Sensitivity setting (switching threshold)	Via software (with control electronics A-LAS-CON1, SI-CON34, or SI-CON8) or via potentiometer (with control electronics AGL4 or AGL4-HS)
Gain (analog signal)	Via software (with control electronics A-LAS-CON1, SI-CON34, or SI-CON8) or via potentiometer (with control electronics AGL4, AGL4-HS, AGL-DIF, or SI-CON11)
Current consumption	Transmitter: typ. 50 mA, receiver typ. 20 mA
Operating temperature range	0°C +50°C
Storage temperature range	-20°C +85°C
Type of connector	7-pole circular connector type Binder 712
Cable length	1 m, 2 m, 3 m, or 5 m
Housing material	Aluminum, anodized in blue
Housing dimensions	Transmitter and receiver: each LxWxH approx. 68 mm x 12 mm x 17 mm
Enclosure rating	IP67
EMC test acc. to	DIN EN 60947-5-2 (€



Sensor Instruments GmbH • D-94169 Thurmansbang • Schlinding 11 Tel. +49 (0)8544 9719-0 • Fax +49 (0)8544 9719-13



Laser Information

The laser transmitters of A-LAS series comply with laser class 1 according to EN 60825-1. Under reasonably foreseeable conditions a class 1 laser is safe. The reasonably foreseeable conditions are kept during specified normal operation. The use of these laser transmitters therefore requires no additional protective measures.

The laser transmitters of A-LAS series series are supplied with an information label "CLASS 1 Laser Product".



Class 1 Laser Product IEC 60825-1: 2014 P<0.39 mW; λ=670 nm COMPLIES WITH 21 CFR 1040.10 AND 1040.11 (CEPT FOR CONFORMANCE WITH IEC 60825-ED. 3, AS DESCRIBED IN LASER NOTICE NO. 56, DATED MAY 8, 2019.








Dimensions



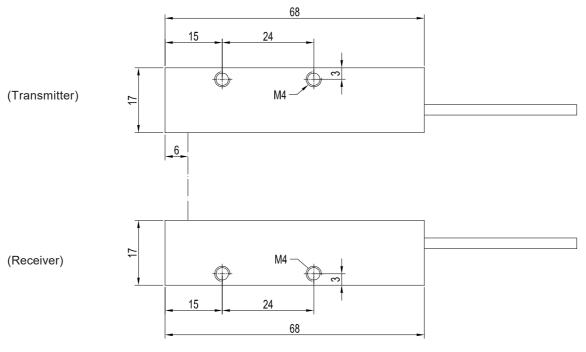

All dimensions in mm



Connector Assignment

7-pole circular connector Binder Series 712:

Connection <u>directly</u> to an electronic control unit from A-LAS Series: AGL4, AGL4-HS, AGL-DIF, SI-CON11, SI-CON8, SI-CON34, A-LAS-CON1







Electronic Control Units


Suitable electronic control units for A-LAS-...-C:












SI-CON11-0/20-IC SI-CON11-4/20 SI-CON11-4/20-IC SI-CON11-5/25 SI-CON11-5/25-IC







(incl. Windows® PC software A-LAS-CON1-Scope)

(incl. Windows® PC software SCOPE34)

Sensor W

