




1. Control of the number of blister packages

During the handling process of blister packages it can happen, that more than one blister package will be transported simultaneously, this should be avoided. For this purpose a laser through beam system type **A-LAS-M18-9.5x4-C**

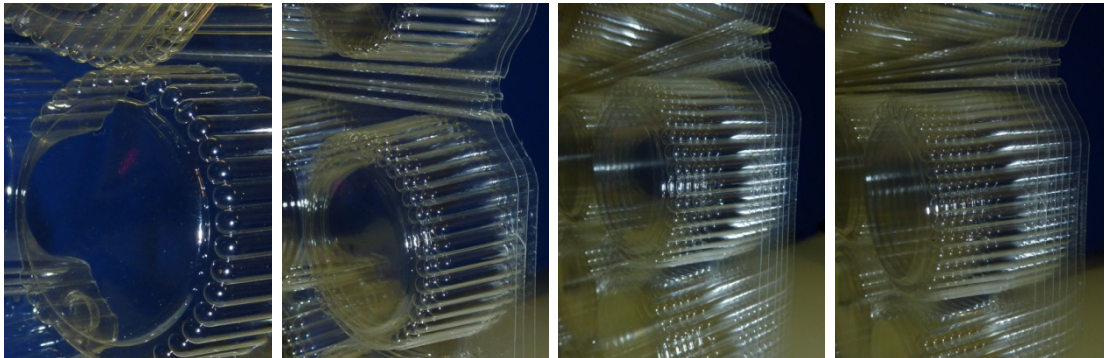

in connection with an **A-LAS-CON1** control electronic is used. At this a part of the laser beam will be reflected and absorbed, as more blister packages are present as higher is the reduction of the laser beam. The screenshots shows the decrease of the signal dependent of the number of blisters.

