

# FIO Series (Accessories)

## ▶ MOUNT-A3.0-170°-5

Mounting bracket for transmitted light fiber optics with sensor head type D-S-A3.0-...

- For mounting and optimum alignment of a transmitted light fiber optics type D-S-A3.0-...
- Angle of incidence 170° (2x 85° to the vertical) at a distance of 5 mm to the object measured from outer housing edge
- Fixation of the fiber optics by means of plastic screws
- Various mounting possibilities
- Sturdy aluminum housing, anodized in black
- Gloss control of extremely rough surfaces




### Design

**Product name:**

**MOUNT-A3.0-170°-5** (suitable for transmitted light fiber optics D-S-A3.0-...)  
(formerly: KL-5/85°-A3.0)


Please order fiber optics separately, for further information please cf. catalog „FIO Series“

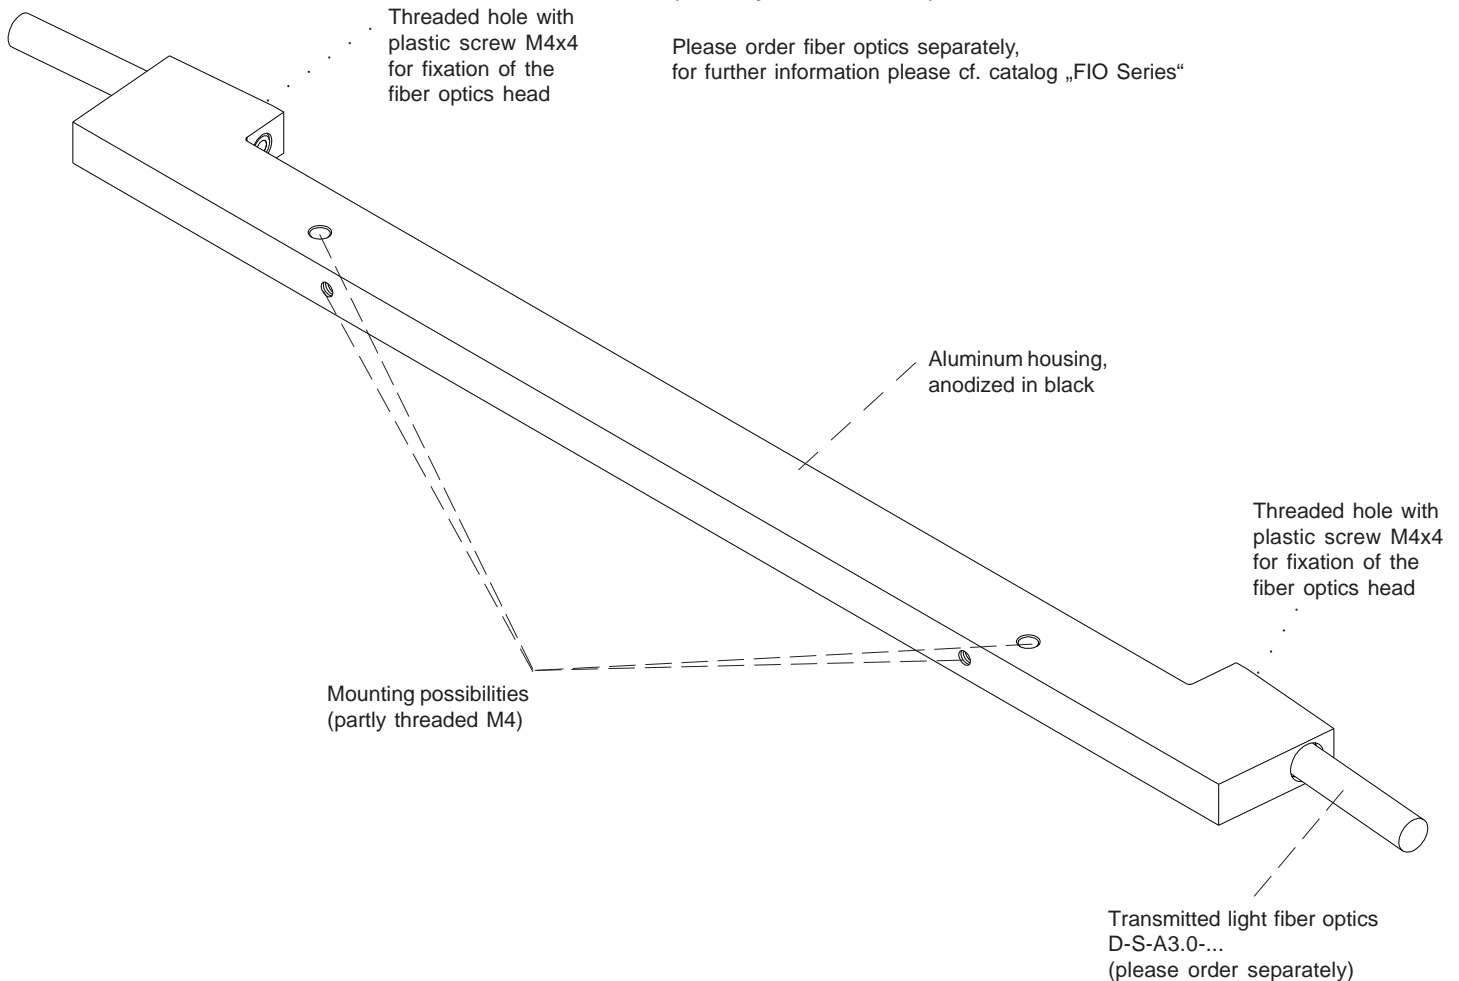



Dimensions

MOUNT-A3.0-170°-5

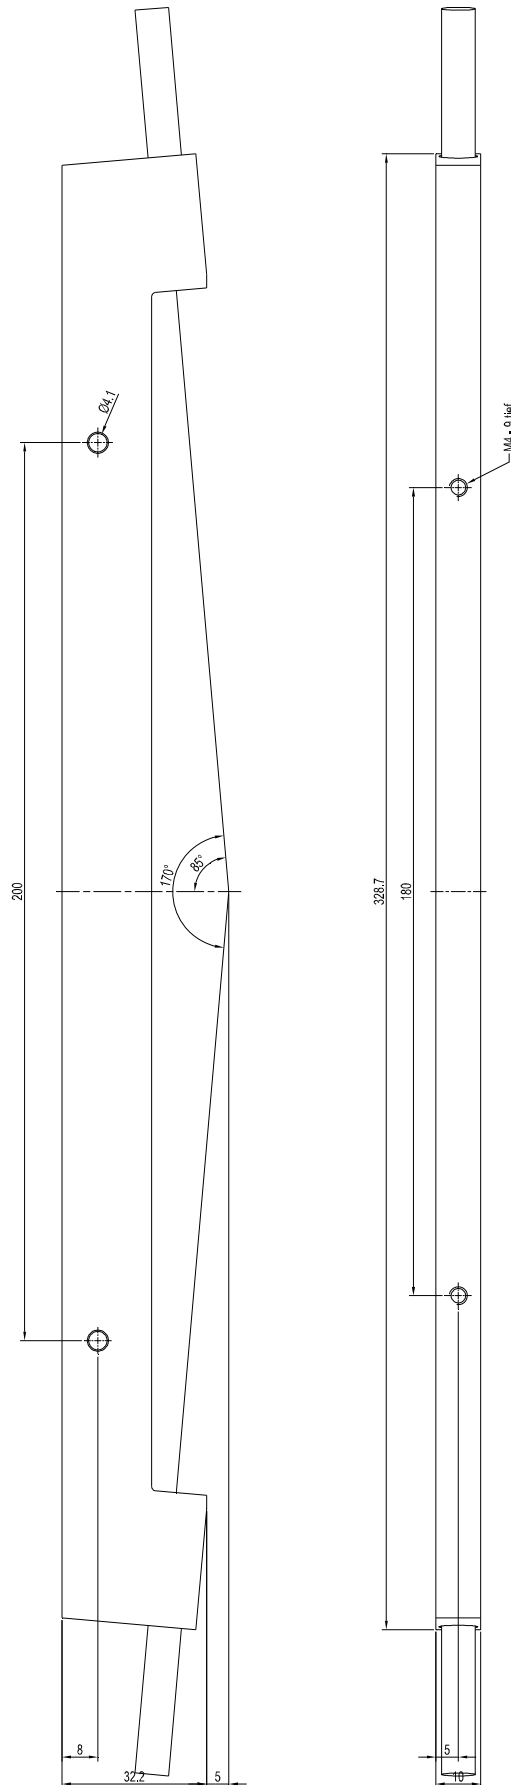

All dimensions in mm